

HALFEN SCAFFOLD ANCHORS

Technical Product Information





We imagine, model and make engineered products and innovative construction solutions that help turn architectural visions into reality and enable our construction partners to build better, safer, stronger and faster.

Leviat is a world leader in connecting, fixing, lifting and anchoring technology.


From the build of new schools, hospitals, homes and infrastructure, to the repair and maintenance of heritage structures, our engineering skills are making a difference around the world.

We provide technical design assistance at every stage of a project, from initial planning to installation and beyond.

Our technical support services range from simple product selection through to the development of a fully customised project-specific design solution.

Every promise we make locally, has the commitment and dedication of our global team behind it. We employ almost 3,000 people at 60 locations across North America, Europe and Asia-Pacific, providing an agile and responsive service worldwide.




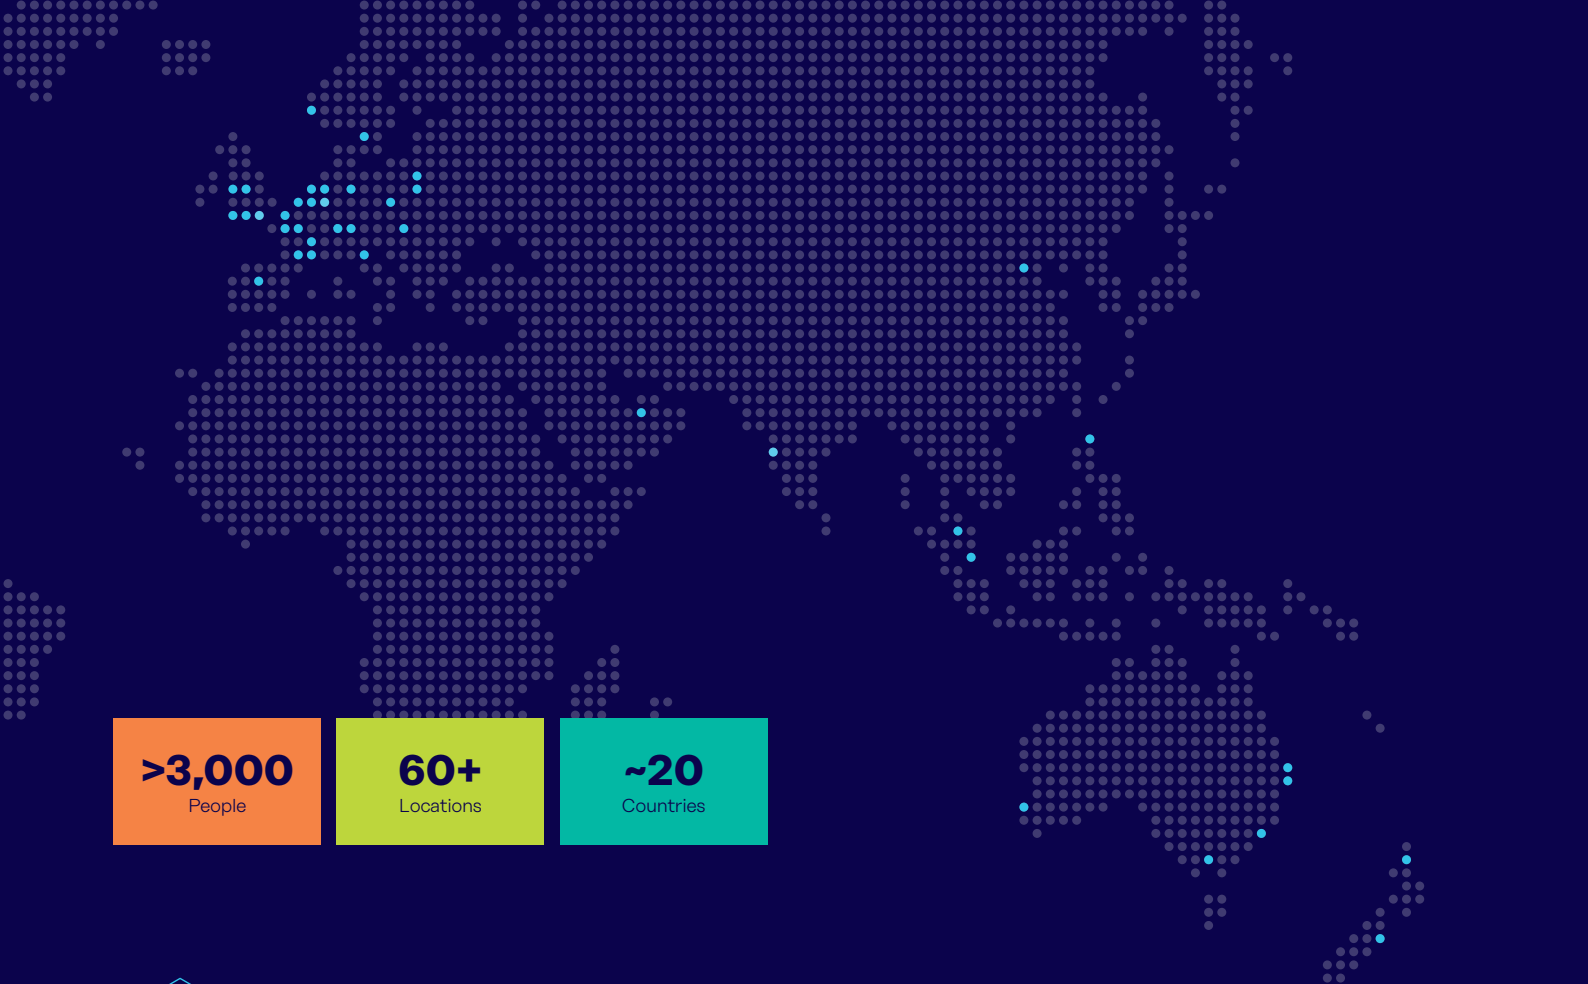

>3,000
People

60+
Locations

~20
Countries




Façade Support & Restraint

Systems for the safe and thermally-efficient fixing of the external building envelope, including brick and natural stone, insulated sandwich panels, curtain walling and suspended concrete façades, and also the repair and strengthening of existing masonry installations.


- Masonry Support Systems
- Windposts
- Lintels
- Brick Slip Systems
- Wall Ties & Restraints
- Masonry Reinforcement
- Natural Stone Façade Systems
- Cavity Trays
- Sandwich Panel anchor
- Suspended concrete façade
- Masonry Repair

Other areas of expertise:




Structural Connections

Systems to form robust, efficient connections, and continuity of concrete reinforcement as necessary, between walls, slabs, columns, beams and balconies, providing structural integrity as well as enhanced thermal and acoustic performance.



Lifting & Bracing

Systems for the safe and efficient transportation, lifting and temporary bracing of cast concrete elements and tilt-up panels before permanent structural connections are made.




Anchoring & Fixing

Systems for fixing secondary fixtures to concrete, including anchor channels, bolts and inserts; also tension rod systems for roofs and canopies.



Formwork & Site Accessories

Non-structural accessories that complement our engineered solutions and help keep your construction environment operating safely and efficiently, including moulds for casting standard and special concrete elements and construction essentials such as reinforcing bar spacers.



Industrial Technology

Mounting channels, pipe clamps and other versatile framing systems that provide safe fixing in a wide range of industrial applications.

Leviat product ranges:

Ancon | Aschwanden | Connolly | Halfen | Helifix | Isedio | Meadow Burke | Modersohn | Moment | Plaka | Scaldex | Thermomass

HALFEN SCAFFOLD ANCHORS

Introduction

Scaffolding in construction of ventilated façades or ETICS thermal insulation systems

Scaffolding used in the construction industry must be planned in accordance with DIN EN 12810 and DIN EN 12811. These standards include type specific requirements for initial scaffolding for building and also for façade installations and maintenance work. These regulations do not apply for safety scaffold; DIN 4420 is applied here.

To connect to the supporting structure of the buildings, scaffolding anchors are used which must be technically capable of securing the scaffolding reliably through the thickness of the façade. This is the only safe method to install the insulation and façade elements for the building from the scaffolding. As it is not possible to stabilize scaffolding to a ventilated brick render façade or an ETICS façade (*External Thermal Insulation Composite System*), the scaffold anchors must be able to absorb both compressive and tensile loads.

A scaffold of load category 4 is usually required for façade installation. Load categories of this class and upwards are required if the scaffold is used for temporary storage of larger loads or if cranes are used to place brick or stone stacks on the scaffold.

Load category 3 scaffold systems are generally used for façade maintenance.

We manufacture the scaffold anchors and also specify the maximum working loads for each anchor both vertically and horizontally to the façade to ensure the required reliability in planning and application.

The maximum anchor loads for the scaffold result from the static calculation, the specifications in the general building authority approval for scaffolding or for standard application as specified in DIN 4420-3.




Pipe coupler scaffolding

Our scaffold anchors meet the requirements of EN 12810/ EN 12811 or DIN 4420 and can also be used as permanent scaffold anchors (optional) in accordance with DIN 4426.

In accordance with DIN 4426 specifications (not adopted by building authorities) if the load-bearing components of an external wall are designed with a façade system that cannot absorb anchor loads, permanent scaffolding anchors must be provided for anchoring of temporary workplaces for future maintenance and inspection of the façade. These façades include curtain wall systems, thermal insulation composite systems, ventilated masonry and similar.

Permanent scaffolding anchors are not required if façade maintenance units are available for maintenance and inspection, if an elevating work platform can be used or if the height of the building does not exceed eight metres.

It is the client's decision which system is used for future maintenance and façade inspection work; suitable fixings must be taken into account as early as in the planning phase of the façade.

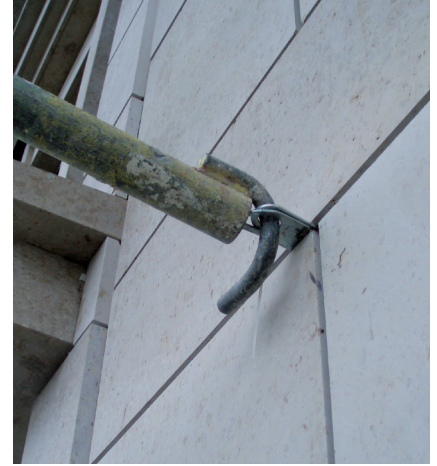

Scaffold element connected to a strap

Our scaffold anchors remain in the building after dismantling the scaffolding and are concealed so they do not interfere with the appearance of the façade. This ensures that re-quired scaffolding can be erected at a later date without needing additional anchoring points.

The position, fixing method and load-bearing capacity of the scaffold anchors must be taken into account when planning the façade and included in the building's documentation. The choice of anchors depends on the type of scaffolding selected, the anchor grid of the scaffolding and the distribution of the joints in the façade. Loads from the scaffolding are transferred to the our scaffold anchors using reusable straps or ring bolts, which are connected directly to the scaffold anchors.

The two-part straps consist of a load strap and a safety strap. These ensure that the scaffold anchors do not spoil the visual aspect of the façade and when required, the scaffolding is safely connected to the anchors.

In brickwork render façades or in ETICS façades the scaffolding is connected to the scaffold anchor using a ring bolt.

HALFEN SCAFFOLD ANCHORS

Introduction

In principle, the scaffold anchor should be selected according to the type of façade. A distinction is made between the following types of façade:

- Brickwork façade
- Natural stone façade
- Concrete façade
- External Thermal Insulation Composite Systems



HALFEN GE-HB Scaffold anchors for natural stone façades

Scaffolding anchors are the current technological standard for scaffolding used with ventilated façades or in ETICS façades.

Scaffold anchors avoid damage to the façade and are an important and inte-

gral part of every façade project today. Increased demands on thermal insulation have resulted in thicker insulation material in façades and larger cavities for ventilated façades.

Anchoring scaffolding using only ring bolts is not recommend as lengths of 300mm and more would be required. Ring bolts with long shaft lengths would deform and bend as a result of the high loads caused by the scaffolding. This bending would cause considerable damage to the façade. This could lead to failure of the anchorage or even to scaffold collapse.

Static verification is required when using ring bolts, which are longer than 70 mm; additional technical measures are also required to absorb loads (F_{II}) parallel to the façade.

These measures must be statically verified and involve increased material and labour costs also for the subsequent scaffold installation.

To meet the ever-increasing demands

on thermal insulation HALFEN HGA-Q and HGA-F Scaffold anchors can be installed with a HALFEN Thermal separation strip between the building and the anchor. The thermal separation strips reduce the heat loss caused by the scaffold anchors and improve the heat transmission efficiency of the building.



HALFEN HGA-Q Scaffold anchors with short ring bolt. The side struts absorb loads parallel to the façade.

Standards, design guidelines and regulations for scaffold anchors

DIN 4420-3: 2006-01	Service and work scaffolds - Part 3: Selected scaffolding types and their standard design
DIN 4426: 2017-01	Equipment for building maintenance - Safety requirements for workplaces and traffic access - Design and execution
DIN EN 1993-1-1:2010-12	Eurocode 3: Design and construction of steel structures - Part 1-1: General design rules and regulations for structural engineering
DIN EN 1993-1-4: 2015-10	Eurocode 3: Design and construction of steel structures - Part 1-4: General design rules - Additional regulations for the use of stainless steels
DIN EN 12811-1: 2003	Temporary structures for buildings - Part 1: Work scaffolding - Performance specifications, Design, construction and dimensioning
DIN 18451: 2016-09	VOB = German procurement and contract regulations for construction work - Part C: General Terms and Conditions of Contract for Construction Services (ATV) - scaffolding work
FRG 1: 2019	Technical regulations for scaffold structures
European Technical Assessment	For fixing paraphernalia: Dowels and HALFEN Cast-in channels
Building authority approvals	Approvals for components and fixings made of stainless steels
Building authority approvals	Provided by scaffolding suppliers

HALFEN SCAFFOLD ANCHORS

Product Overview


Load capacities and anchor spacings

Note

The maximum horizontal anchoring spacing [m] is a typical example for use in steel tube coupling scaffolds (standard application) for façades with horizontal work platforms according to **DIN 4420-3**, and for use as permanent scaffolding anchors according to **DIN 4426**.

The specified characteristic resistance of the scaffold anchors and the horizontal and vertical spacing must be adapted to the installation grid of the scaffold, taking the static calculation and general building authority approval into account.

HGA-Q



→ page 6

Application is recommended for:

Thermal insulation composite systems




Brickwork façade

Natural stone façade

Concrete façade

Characteristic load capacity ($\gamma_F = 1.0$)

$F_{\perp} = 3.9 \text{ kN}$ (compression/tension)
 $F_{\parallel} = 1.3 \text{ kN}$

DIN EN 12811-1 / DIN 4420-3	Non-covered scaffolding ①	Load class 1 to 6		$h \leq 10 \text{ m}$	2.91 m
	$h \leq 20 \text{ m}$		2.54 m		
	$h \leq 30 \text{ m}$		2.18 m		
	Covered scaffolding ①	Load class 1 to 6		$h \leq 10 \text{ m}$	1.05 m
	$h \leq 20 \text{ m}$		0.99 m		
	$h \leq 30 \text{ m}$		0.95 m		
	Covered scaffolding ②	Load class 1 to 6		$h \leq 10 \text{ m}$	2.13 m
	$h \leq 20 \text{ m}$		2.02 m		
	$h \leq 30 \text{ m}$		1.92 m		
DIN 4426	Covered and non-covered scaffolding (vertical anchor spacing: 4.0 m) ①	Load class 1 to 6		1.75 m	





① The loads may be reduced proportionately if the vertical anchor spacing distance is less than 4.0 m.

② The loads may be reduced proportionately if the vertical anchor spacing distance is less than 2.0 m.

③ With static verification of the horizontal load bearing capacity in the brickwork grout (shear force verification in brickwork).

HALFEN SCAFFOLD ANCHORS

Product Overview

HGA-ZN  → page 7	GE-HB  → page 8	GE-VB  → page 9	HGA-F  → page 10
			
			
			
$F_{\perp} = 5.6 \text{ kN}$ (compression/tension)	$F_{\perp} = 3.4 \text{ kN}$ (compression/tension) $F_{\parallel} = 1.2 \text{ kN}$	$F_{\perp} = 2.7 \text{ kN}$ (compression/tension) $F_{\parallel} = 0.9 \text{ kN}$	$F_{\perp} = 3.4 \text{ kN}$ (compression/tension) $F_{\parallel} = 1.2 \text{ kN}$
4.17 m	2.52 m	2.00 m	2.52 m
3.63 m	2.19 m	1.74 m	2.19 m
3.41 m	2.00 m	1.50 m	2.00 m
1.50 m	0.91 m	0.72 m	0.91 m
1.41 m	0.85 m	0.68 m	0.85 m
1.36 m	0.82 m	0.65 m	0.82 m
3.04 m	1.84 m	1.46 m	1.84 m
2.89 m	1.74 m	1.38 m	1.74 m
2.75 m	1.66 m	1.32 m	1.66 m
2.50 m	1.51 m	1.20 m	1.51 m

HALFEN SCAFFOLD ANCHORS

Load Application Horizontally Parallel and Perpendicular to the Main Support Structure

HGA- Q Scaffold anchor




HGA-Q Scaffold anchor incl. plastic cap and ring bolt (the ring bolt requires separate static verification).

HALFEN HGA-Q Scaffold anchors are used to fix scaffolding to ETICS façades and in the horizontal joints in brickwork render or concrete façades. This anchorage is suitable for loads at right angles ($F_{\perp}$) and loads horizontally and parallel to the main building support structure ($F_{\parallel}$) according to EN 12811 or DIN 4426 and the general building authority approval for scaffolding.

HALFEN HGA-Q Scaffold anchors reliably transfer loads into the load-bearing support structure of the building. An insulation strip is available as an option to thermally separate the scaffold anchors from the building. The scaffold anchor is supplied with a ring bolt and a plastic cap. The anchors are fixed with approved HALFEN Anchor bolts or to HALFEN Cast-in channels previously installed in the main support structure.



Note: Required anchor spacings according to DIN EN 12811-1 / DIN 4420-3 and DIN 4426 see table on page 4-5.

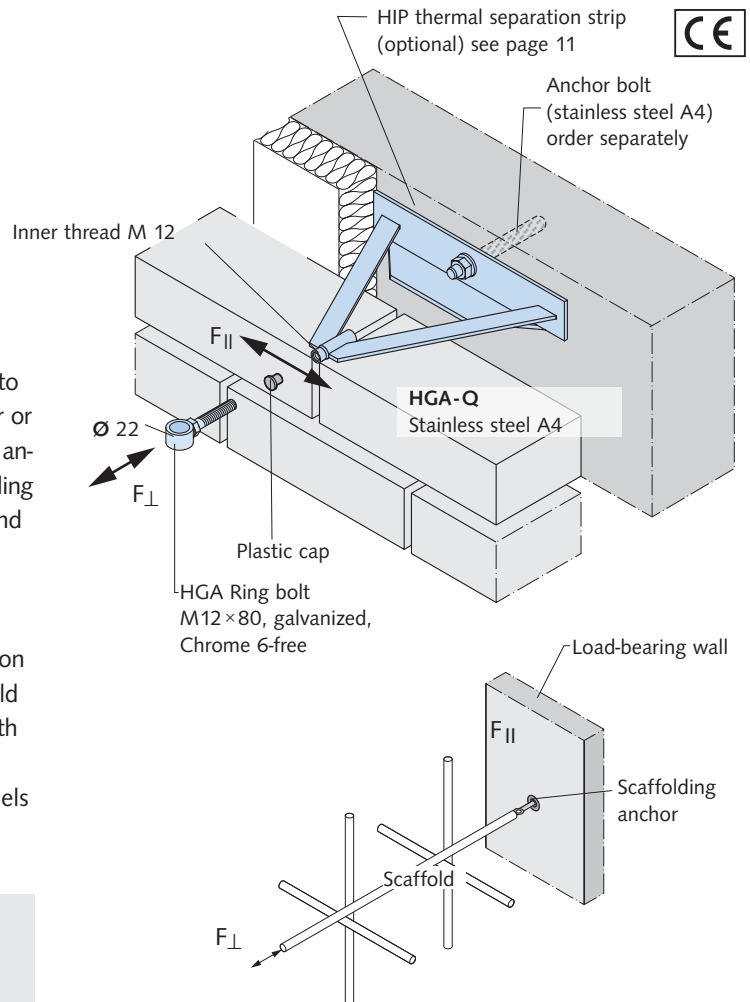


HGA-Q Scaffold anchor

Top view	Article name	Order no. 0159.010-	k ① [mm]	g [mm]
	HGA-Q 160	00101	160	165-180
	HGA-Q 185	00102	185	190-205
	HGA-Q 210	00103	210	215-230
	HGA-Q 235	00104	235	240-255
	HGA-Q 260	00105	260	265-280
	HGA-Q 285	00106	285	290-305
	HGA-Q 310	00107	310	315-330
	HGA-Q 335	00108	335	340-355
	HGA-Q 360	00109	360	365-380
HALFEN Wedge anchor for non-cracked concrete	HB-B 12-10-25/105-A4 (Order no.: 0432.060-00135)			
HALFEN Anchor stud for cracked and non-cracked concrete	HB-VMZ-A-80 - M12-25/125-A4 (Order no.: 0432.380-00010)			
① Further dimensions on request. Individual ring bolts for use with previously installed HALFEN HGA-Q or HGA-ZN Scaffold anchors can be found in accessories, see page 11.				

HALFEN SCAFFOLD ANCHORS

Load Application Perpendicular to the Main Building Support Structure



HGA - ZN Scaffold anchor

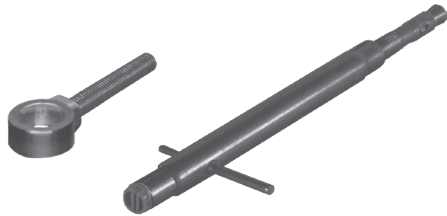

HGA-ZN Scaffold anchor incl. plastic cap and ring bolt

HALFEN HGA-ZN Scaffold anchors are used to fix scaffolding to brickwork render. This scaffold anchorage is only suitable for transferring loads at right angles ($F_{\perp}$) to the main support structure according to EN 12811 and DIN 4426 and the general building authority approval for scaffolding.

HALFEN HGA-ZN Scaffold anchors are supplied with a ring bolt and a plastic cap. The anchors are fixed to the support structure with approved HALFEN Anchor bolts. If horizontal loads also occur parallel to the anchoring surface ($F_{\parallel}$) these must be transferred to the exterior cladding. If the outer cladding is not suitable for this type of load, then the HGA-Q scaffold anchor must be used. These are designed for loads at right angles and horizontally parallel to the anchoring surface.

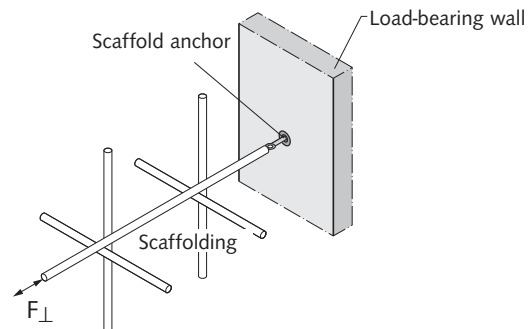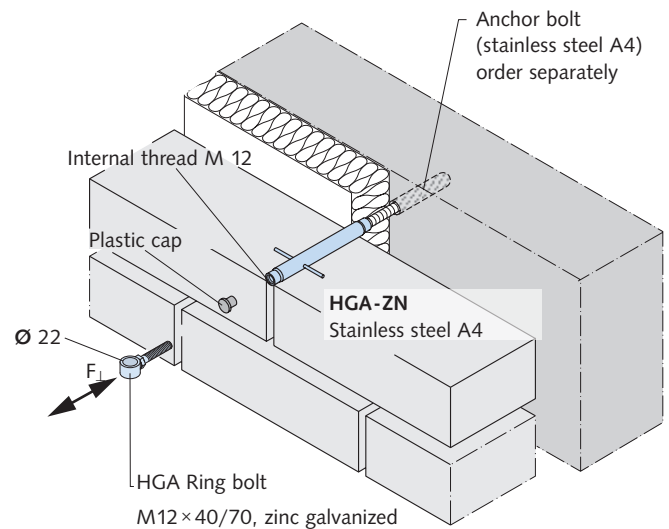

Note: Required anchor spacings according to DIN EN 12811-1 / DIN 4420-3 and DIN 4426 see table on page 4-5.

Scaffold anchor HGA-ZN


Top view	Article name	Order no. 0159.020-	L ① [mm]	g [mm]
	HGA-ZN 115	00001	115	145 - 165
	HGA-ZN 145	00002	145	165 - 195
	HGA-ZN 175	00003	175	195 - 225
	HGA-ZN 205	00004	205	225 - 255
	HGA-ZN 235	00005	235	255 - 285
	HGA-ZN 265	00006	265	285 - 305
	HGA-ZN 295	00007	295	315 - 335
	HGA-ZN 325	00008	325	345 - 365
	HGA-ZN 355	00009	355	375 - 395
HALFEN Anchor bolt for non-cracked concrete	HB-B 12-50-65/145-A4 (Order no.: 0432.060-00016)			
HALFEN Anchor bolt for cracked and non-cracked concrete	HB-VMZ-A 80 - M12-50/150-A4 (Order no.: 0432.380-00011)			

① Further dimensions on request.
Individual ring bolts for use with previously installed HALFEN HGA-Q or HGA-ZN Scaffold anchors can be found in accessories, see page 11.

HALFEN SCAFFOLD ANCHORS

Grout-in Scaffold Anchor


GE-HB Scaffold anchor

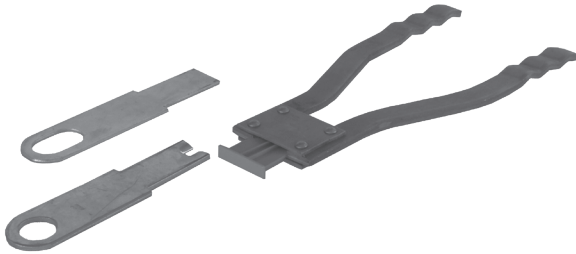


GE-HB Scaffolding anchor including plastic cap

HALFEN GE-HB Scaffold anchors are used to fix scaffolding in the horizontal joint of natural stone façades. The anchorage is suitable for loads at right angles ($F_{\perp}$) and loads horizontally and parallel to the main building support structure ($F_{\parallel}$) according to DIN EN 12811 or DIN 4426 and the general building authority approval for scaffolding.

HALFEN GE-HB Scaffold straps are used to reliably transmit loads into the load-bearing inner structure of the building. The scaffold anchor is supplied with two reusable straps. The second strap locks into the first strap and provides a reliable anchor point for attaching scaffolding. The GE-HB Anchor is fixed with cement based mortar in the support structure.

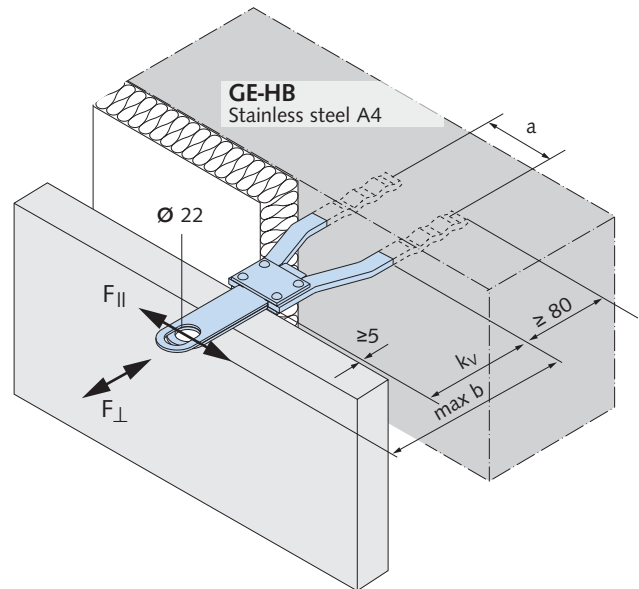

Vertical section

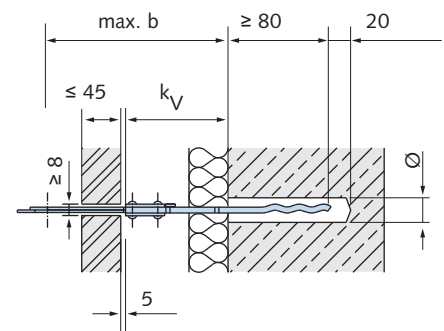

Note: Required anchor spacings according to DIN EN 12811-1 / DIN 4420-3 and DIN 4426 see table on page 4-5.

GE-HB Scaffold anchor including straps and plastic cap

Article name	Order no. 0765.010-	max. b [mm]	a [mm]	kv ① [mm]	Ø [mm]
GE-HB-135	00001	135	71	45-60	25
GE-HB-150	00002	150	70	60-75	25
GE-HB-165	00003	165	70	75-90	25
GE-HB-180	00004	180	80	90-105	30
GE-HB-195	00005	195	80	105-120	30
GE-HB-210	00006	210	80	120-135	30
GE-HB-225	00007	225	80	135-150	30
GE-HB-240	00008	240	105	150-165	30
GE-HB-255	00009	255	109	165-180	30
GE-HB-270	00010	270	109	180-195	30
GE-HB-285	00011	285	109	195-210	30
GE-HB-300	00012	300	120	210-225	30
GE-HB-315	00013	315	127	225-240	30
GE-HB-330	00014	330	129	240-255	35

① Further dimensions on request.

HALFEN GE-HB Straps

Both HALFEN GE-HB Straps are available separately for use with previously installed scaffold anchors.



Individual straps


Article name	Order no. 0570.030-
GE-HB-LA EL 01	00001
GE-HB-LA EL 02	00002

Note: Both GE-HB Straps are always required for application.

HALFEN SCAFFOLD ANCHORS

Grout-in Scaffold Anchor


GE-VB Scaffold anchor

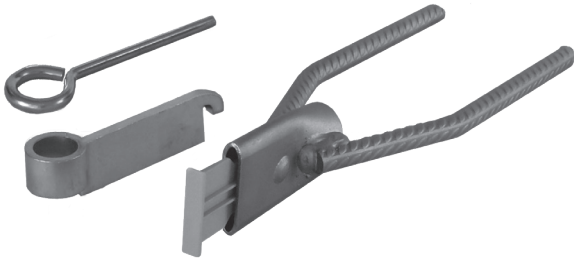


GE-VB Scaffold anchor incl. hook strap, ring bolt and PVC Cap

HALFEN GE-VB Scaffold anchors are used to fix scaffolding in the vertical joint between natural stone façade slabs. The anchorage is suitable for loads at right angles ($F_{\perp}$) and loads horizontally and parallel to the main building support structure ($F_{\parallel}$) according to DIN EN 12811 or DIN 4426 and the general building authority approval for scaffolding.

HALFEN GE-VB Scaffold anchors are used to reliably transmit loads into the load-bearing inner structure of the building. The scaffold anchor is supplied with reusable hook straps, and a ring bolt to secure the strap. The GE-VB Anchor is grouted with cement based mortar in the support structure.

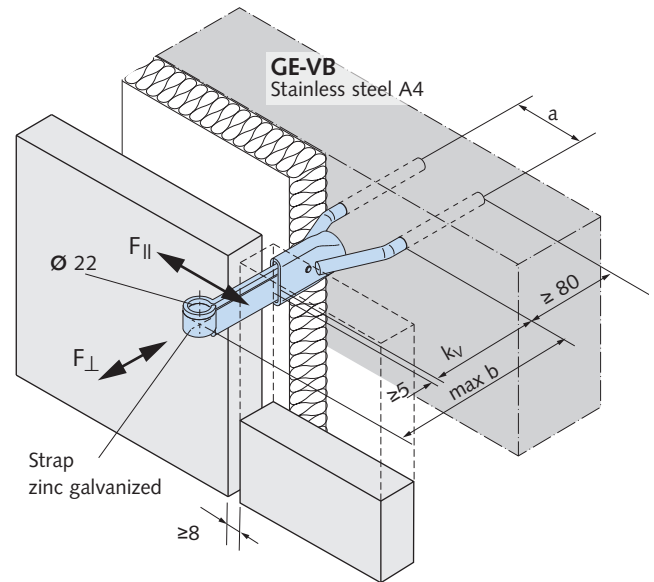

Vertical section

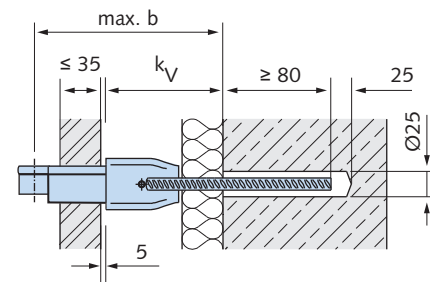

Note: Required anchor spacings according to DIN EN 12811-1 / DIN 4420-3 and DIN 4426 see table on page 4-5.

GE-VB Scaffold anchor including anchor, ring bolt and plastic cap

Article name	Order no. 0765.020-	max. b [mm]	a [mm]	kv ① [mm]
GE-VB-200	00001	200	80	115 - 135
GE-VB-220	00002	220	80	135 - 155
GE-VB-240	00003	240	90	155 - 175
GE-VB-260	00004	260	100	175 - 195
GE-VB-280	00005	280	110	195 - 215
GE-VB-300	00006	300	120	215 - 235
GE-VB-320	00007	320	120	235 - 255
GE-VB-340	00008	340	130	255 - 275
GE-VB-360	00009	360	130	275 - 295

① Further dimensions on request.

Additional straps

We also provide the hook strap and ring bolt separately for fitting to previously installed GE-VB Scaffold anchors.

EL 03



EL 04




Individual straps

Article name	Order no. 0570.040-
GE-VB-LA EL 03	00005
GE-VB-LA EL 04	00003

HALFEN SCAFFOLD ANCHORS

Dowel Application

HGA-F Scaffold anchors

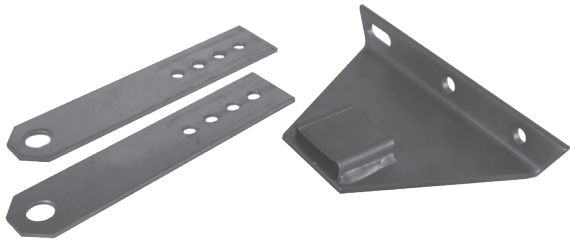

HGA-F Scaffold anchors


HALFEN HGA-F Scaffold anchors are used to fix scaffolding in the horizontal joint between natural stone or concrete façade slabs. The anchorage is suitable for loads at right angles ($F_{\perp}$) and loads horizontally and parallel to the main building support structure ($F_{\parallel}$) according to DIN EN 12811 or DIN 4426 and the General building authority approval for scaffolding.

HALFEN HGA-F Scaffold anchors are used to reliably transmit loads into the load-bearing inner structure of the building. As an option a thermal separation strip is available for use between the anchor and the building. The scaffold anchor is supplied with two reusable straps. The system, consisting of two strap slotted together, allows length adjustment.


The HGA-F Anchor is fixed with two approved HALFEN Anchor bolts or to HALFEN Cast-in channels previously installed in the main support structure.



Note: Required anchor spacings according to DIN EN 12811-1 / DIN 4420-3 and DIN 4426 see table on page 4-5.

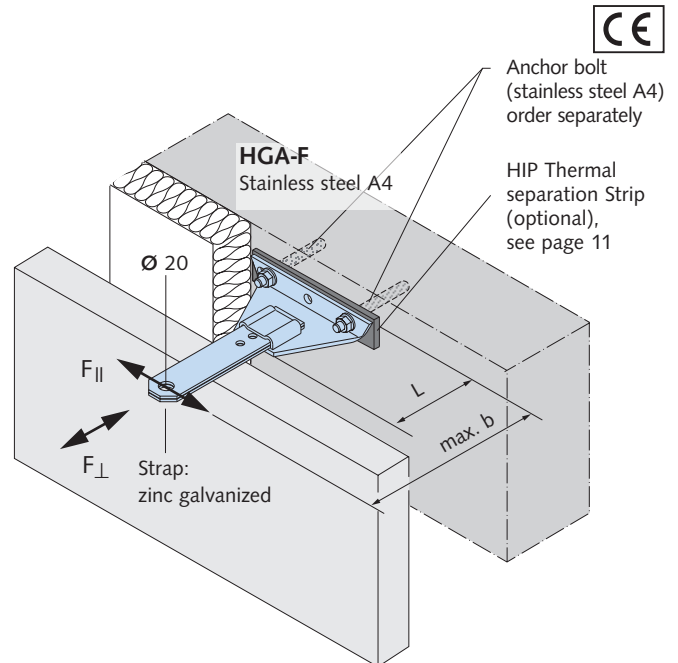

Vertical section

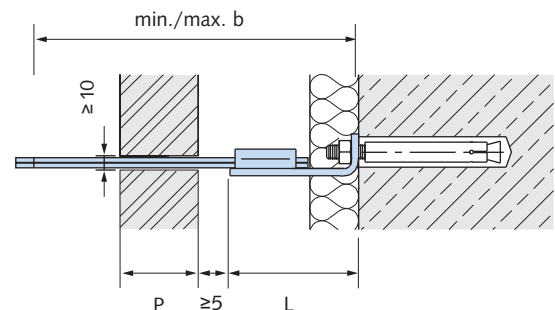

HGA-F Scaffold anchors						
Article name	Order no. 0233.010-	min. b [mm]	max. P [mm]	max. b [mm]	max. P [mm]	L ② [mm]
HGA-F-110	00001	233	110	277	150	109
HGA-F-140	00002	241	80	307	150	139
HALFEN Bolt anchor for non-cracked concrete ①	HB-B 12-10-25/105-A4 (Order no.: 0432.060-00135)					
HALFEN Injection anchor for cracked and non-cracked concrete ①	HB-VMZ-A-80 - M12-25/125-A4 (Order no.: 0432.380-00010)					
① Two anchor bolts are required for each anchor. ② Further dimensions on request.						

HGA-F Straps

The HALFEN HGA-F Strap is available separately for use with previously installed scaffold anchors.



Individual straps


Article name	Order no.
HGA-F Strap	00001
Note: Two straps are required for each anchor.	

HALFEN SCAFFOLD ANCHORS

Accessories

Ring bolts and sealing caps

HGA-RS Scaffold anchor ring bolt



HGA-Q/ZN Scaffold anchor ring bolt

	Order no. 0160.000-	Type
HGA-RS - M12×80 GV	00002	zinc galvanized Chrome 6-free


HGA-STO Scaffold anchor plastic cap



HGA-Q and HGA-ZN Plastic sealing cap

	Order no. 0575.070-	Colour
HGA-STO-M12-GPN700	00001	light grey

GE-KAP Scaffold anchor sealing cap




GE-HB and GE-VB PVC Plastic sealing cap

	Order no. 0765.030-	Colour
GE-KAP-01	00001	black
GE-KAP-02	00002	transparent
GE-KAP-03	00003	light grey

Plug for thermal insulation composite system

Scaffold anchor plug



Manual application; the plug is compressed by hand and expands after installation.

Treated fine pore PUR soft foam with polyethylene core, for up to 17 mm hole diameter.

- suitable for plaster and paint finishes
- rain resistant according to DIN 18 055/EN 86
- UV resistant, fire resistance class B1
- length: 40 mm
- diameter: 30 mm
- items in package = 25

HGA-Q ETICS Scaffold anchor plug

	Order no. 0159.040-	Colour
HGA-STO WDV5	00001	light grey

Thermal separation strip; only for HGA-Q/HGA-F

HALFEN HIP Thermal separation strip



The HIP plate is a 5 mm thick rigid foam strip (PVC) for thermal separation of the scaffolding anchors from the support structure.

- allowable compressive stress $\sigma_m = 9 \text{ N/mm}^2$
- thermal conductivity $\lambda = 0.09 \text{ W/m} \times \text{K}$
- resistance class B1

HIP Thermal separation strip

	For anchor type	Order no. 0159.030-
HIP 1	HGA-F 110/140 HGA-Q 160/185/210	00001
HIP 2	HGA-Q 235/260/285	00002
HIP 3	HGA-Q 310/335/360	00003

HALFEN SCAFFOLD ANCHORS

Fixing Accessories

Fixing the scaffold anchors using HALFEN HB-B Bolt anchors A4

HB-B Bolt anchor A4

see page 6, 7 and 10;
approved for non-cracked concrete



Fixing the scaffold anchors using the HALFEN HB-VMZ Injection system A4

HB-VMZ Bolt anchor A4

see page 6, 7 and 10;
approved for cracked
and non-cracked concrete



HB-VM-X Mixing nozzle

Order no. 0433.040-00039



Please refer to our "HALFEN HB Anchor bolts systems"
technical catalogue for more detailed information

HB-VM-P 345 Dispenser, Order no. 0433.040-00077



HB-VMZ 280 Cartridge, Order no. 0433.040-00100



Fixing the scaffold anchors using HALFEN Cast-in channels

Using HALFEN Cast-in channels to fasten
the scaffold anchors has the following
advantages:

- adjustability
- flexible planning
- good installation reliability



HALFEN HTA-CE Cast-in channel		With HALFEN HS T-bolt including hexagon nut					
		Article name	Thread		l [mm]		Torque [Nm]
HTA-CE 49/30	- A4	HS 50/30 -	M 12	×	30	- A4	25

HALFEN PSA Anchor point for personal fall protection equipment according to DIN EN 795

A single personal fall protection anchor point (PSA) consists of an approved, DEMU T-FIXX®, stainless steel fixing anchor, an identification cap and an approved attachment anchor. The suitability of the approved DEMU T-FIXX® fixing anchor as a personal fall protection anchor point for a maximum of two people was confirmed in a DGUV* test based on CEN/TS 16415.

DEMU T-FIXX® M16, A4

Suitable attachment anchor, for example
RUD PSA INOX STAR M16



Identification cap



* DGUV Deutsche Gesetzliche Unfallversicherung
German occupational safety insurance.

Order number for the T-FIXX® with Identification clip;
for use as attachment point for personal safety
equipment (PSA): **0020.270-00508**

HALFEN SCAFFOLD ANCHORS

Tender Text Examples

Tender text examples for scaffold anchors and accessories

1. Scaffold anchors, load assumptions according to scaffold statics, scaffold approval or DIN EN 12811-1 / DIN 4420-3 and DIN 4426

1.1 HALFEN HGA-Q Scaffold anchors

HALFEN HGA-Q Scaffold anchors, for anchoring to cast-in HALFEN Channels (separate position) or approved HALFEN Anchor bolts (separate position), for scaffold loads acting at right angles and horizontally parallel to the building ($F_{\perp} = 3,94 \text{ kN}$ / $F_{\parallel} = 1,31 \text{ kN}$) according to scaffold statics, scaffold approval, DIN EN 12811-1 / DIN 4420-3 and DIN 4426 in the horizontal joint of masonry, ETICS or concrete panel façades,

incl. plastic cap and galvanized, Chrome6 free ring bolts, with CE marking,

Type HGA-Q-K


with

K = cantilever length [mm]..... (160 / 185 / 210 / 235 / 260 / 285 / 310 / 335 / 360),

body material: stainless steel (A4), corrosion resistance class CRC III

according to DIN EN 1993-1-4: 2015, table A.2, section 3;

or similar; deliver and install according to the manufacturer's instructions.

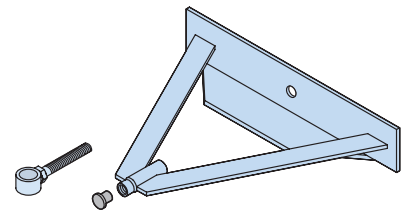

1.2 HALFEN HGA-ZN Scaffold anchors

HALFEN HGA-ZN Scaffold anchors, for anchoring to cast-in HALFEN Channels (separate position) or approved HALFEN Anchor bolts (separate Position), for scaffold loads acting at right angles and horizontally parallel to the building ($F_{\perp} = 5,63 \text{ kN}$) according to scaffold statics, scaffold approval, DIN EN 12811-1 / DIN 4420-3 and DIN 4426 in the horizontal joint of masonry façades,

incl. plastic cap and galvanized, Chrome6 free ring bolts, with CE marking,

Type HGA-ZN-L


with

L = Anchor length [mm] (115 / 145 / 175 / 205 / 235 / 265 / 295 / 325 / 355),

body material: stainless steel (A4) corrosion resistance class CRC III

according to DIN EN 1993-1-4: 2015, table A.2, section 3;

or similar; deliver and install according to the manufacturer's instructions.



HALFEN SCAFFOLD ANCHORS

Tender Text Examples

1.3 HALFEN HGA-F Scaffold anchor

HALFEN HGA-F Scaffold anchor,
for anchoring to cast-in HALFEN Channels (separate position) or approved
HALFEN Anchor bolts (separate position), for scaffold loads acting at right angles
and horizontally parallel to the building ($F_{\perp} = 3,38 \text{ kN}$ / $F_{\parallel} = 1,12 \text{ kN}$) according to
scaffold statics, scaffold approval, DIN EN 12811-1 / DIN 4420-3 and DIN 4426
in the horizontal joint of natural stone, artificial stone or concrete façade panels,


incl. 2 part strap,
with CE marking,

Type HGA-F-110

with

110 = max. cantilever length max b 233–277 mm,
body material: stainless steel (A4), corrosion resistance class CRC III
according to DIN EN 1993-1-4: 2015, table A.2, section 3;
removable straps: zinc galvanized steel,

or similar; deliver and install according to the manufacturer's instructions.

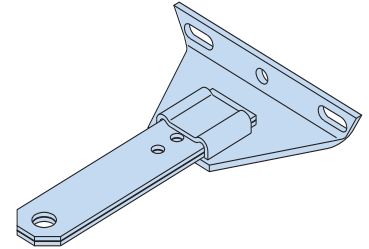

1.4 HALFEN GE-HB Scaffold anchor

HALFEN GE-HB Scaffold anchor,
for grouting into concrete or masonry, for scaffold loads acting at right angles
and horizontally parallel to the building according to scaffold statics,
scaffold approval, DIN EN 12811-1 / DIN 4420-3 and DIN 4426
in the horizontal joint of natural stone or artificial stone façade panels,


incl. 2 part strap,
with CE marking,

Type GE-HB-B

with

B = max. cantilever length [mm] max b
(135 / 150 / 165 / 180 / 195 / 210 / 225 / 240 / 255 / 270 / 285 / 300 / 315 / 330),
body material: stainless steel (A4), corrosion resistance class CRC III
according to DIN EN 1993-1-4: 2015, table A.2, section 3;
removable straps: zinc galvanized steel,

or similar; deliver and install according to the manufacturer's instructions.



HALFEN SCAFFOLD ANCHORS

Tender Text Examples

1.5 HALFEN GE-VB Scaffold anchors

HALFEN GE-VB Scaffold anchors,

for grouting into concrete or masonry, for scaffold loads acting at right angles and horizontally parallel to the building ($F_{\perp}=2,7\text{ kN}$ / $F_{\parallel}=0,9\text{ kN}$) according to scaffold statics, scaffold approval, DIN EN 12811-1 / DIN 4420-3 and DIN 4426 in the vertical joint of natural stone or artificial stone façade panels,

incl. 2 part strap,
with CE marking,

Type GE-VB-B

with

B = max. cantilever length [mm] max b


(200 / 220 / 240 / 260 / 280 / 300 / 320 / 340 / 360),

body material: stainless steel (A4), corrosion resistance class CRC III

according to DIN EN 1993-1-4: 2015, table A.2, section 3;

removable straps: zinc galvanized steel,

or similar; deliver and install according to the manufacturer's instructions.



2. Scaffold anchors accessories


2.1 HALFEN Scaffold anchors plugs for use in ETICS, Type HGA-STO-WDVS

HALFEN HGA-STO-WDVS Scaffold anchors plugs,

for HALFEN HGA-Q and HGA-ZN Scaffold anchors, specially designed for use in composite thermal insulation systems (ETICS), made of treated PUR soft foam with polyethylene core, rain resistant, can be plastered and painted
DIN 18055/EN 86, UV-resistant, fire protection classification B1,

Type HGA-STO-WDVS

or similar; deliver and install according to the manufacturer's instructions.



2.2 HALFEN HIP Thermal insulation for Scaffold anchors

HALFEN HIP Thermal insulation strip for Scaffold anchors,

for HALFEN HGA-Q and HGA-F Scaffold anchors for thermal insulation from the building's main frame, in rigid foam PVC, allowable compressive stress $\delta_m = 9\text{ N/mm}^2$, thermal conductivity $\lambda = 0.09\text{ W / (m}\times\text{K)}$, fire protection classification B1,

Type HIP - X

with

X = Thermal insulation strip.....

1 for anchor types HGA-F 110 / 140 and HGA-Q 160 / 185 / 210;

2 for anchor types HGA-Q 235 / 260 / 285;

3 for anchor types HGA-Q 310 / 335 / 360,

or similar; deliver and install according to the manufacturer's instructions.





Leviat®

Innovative engineered products
and construction solutions that
allow the industry to build safer,
stronger and faster.



Contact Leviat worldwide

Australia

98 Kurrajong Avenue,
Mount Druitt, Sydney, NSW 2770
Tel: +61 - 2 8808 3100
Email: info.au@leviat.com

Austria

Leonard-Bernstein-Str. 10
Saturn Tower, 1220 Wien
Tel: +43 - 1 - 259 6770
Email: info.at@leviat.com

Belgium

Industrielaan 2
1740 Ternat
Tel: +32 - 2 - 582 29 45
Email: info.be@leviat.com

China

Room 601 Tower D,
Vantone Centre
No. A6 Chao Yang Men Wai Street
Chaoyang District
Beijing P.R. China 100020
Tel: +86 - 10 5907 3200
Email: info.cn@leviat.com

Czech Republic

Pekařská 695/10a
155 00 Praha 5
Tel: +420 - 311 - 690 060
Email: info.cz@leviat.com

Finland

Vädursgatan 5
412 50 Göteborg / Sweden
Tel: +358 (0)10 6338781
Email: info.fi@leviat.com

France

Carré Pleyel
5, Rue Pleyel
93200 Saint Denis
Tel: +33 (0)5 34 25 54 82
Email: info.fr@leviat.com

Germany

Liebigstrasse 14
40764 Langenfeld
Tel: +49 - 2173 - 970 - 0
Email: info.de@leviat.com

India

Unit S4, 902, A Wing,
Lodha iThink Techno Campus Building,
Panchpakhadi, Pokharan Road 2,
Thane, 400606
Tel: +91-022 695 33700
Email: info.in@leviat.com

Italy

Via F.lli Bronzetti 28
24124 Bergamo
Tel: +39 - 035 - 0760711
Email: info.it@leviat.com

Malaysia

28 Jalan Anggerik Mokara 31/59
Kota Kemuning,
40460 Shah Alam Selangor
Tel: +603 - 5122 4182
Email: info.my@leviat.com

Netherlands

Slachthuisweg 10
7556 AX Hengelo
Tel: +31 - 74 - 267 14 49
Email: info.nl@leviat.com

New Zealand

246D James Fletcher Drive, Otahuhu,
Auckland 2024
Tel: +64 - 9 276 2236
Email: info.nz@leviat.com

Philippines

27F Office A, Podium West Tower,
12 ADB Avenue, Ortigas Center
Mandaluyong City, 1550
Tel: +63 - 2 7957 6381
Email: info.ph@leviat.com

Poland

ul. Głogowska 151
60-206 Poznań
Tel: +48 - 61 - 622 14 14
Email: info.pl@leviat.com

Singapore

10 Benoi Sector,
Singapore 629845
Tel: +65 - 6266 6802
Email: info.sg@leviat.com

Spain

Polígono Industrial Santa Ana
c/ Ignacio Zuloaga, 20
28522 Rivas-Vaciamadrid
Tel: +34 - 91 632 18 40
Email: info.es@leviat.com

Sweden

Vädursgatan 5
412 50 Göteborg
Tel: +46 - 31 - 98 58 00
Email: info.se@leviat.com

Switzerland

Grenzstrasse 24
3250 Lyss
Tel: +41 (0)800 22 66 00
Email: info.ch@leviat.com

United Arab Emirates

RA08 TB02, PO Box 17225
JAFZA, Jebel Ali, Dubai
Tel: +971 (0)4 883 4346
Email: info.ae@leviat.com

United Kingdom

President Way,
President Park,
Sheffield S4 7UR
Tel: +44 - 114 275 5224
Email: info.uk@leviat.com

USA / Canada

6467 S Falkenburg Road
Riverview, FL 33578
Tel: (800) 423-9140
Email: info.us@leviat.us

For countries not listed
Email: info@leviat.com

Notes regarding this document

© Protected by copyright. The information in this publication is based on state-of-the-art technology at the time of publication. In every case, project working details should be entrusted to appropriately qualified and experienced persons. Leviat shall not accept liability for the accuracy of the information in this document or for any printing errors. We reserve the right to make technical and design changes at any time. With a policy of continuous product development, Leviat reserves the right to modify product design and specification at any time.

Leviat®